

## 60V 50A N-channel Enhancement Mode Power MOSFET

### Description


The AKT50N06T is an N-Channel enhancement mode power MOSFET, it has low static on-resistance and high avalanche energy strength. This device provide excellent switching performance for switched mode power supplies, low voltage applications such as DC/DC converters.

### Features

- Low on-Resistance:  $R_{DS(on)}=0.018\Omega(\text{typ.})$
- Special Process Technology for high ESD Capability
- 100% Avalanche Test
- Good Stability and Uniformity with High  $E_{AS}$

### Applications

- Switched Mode Power Supplies
- Low Voltage Applications Such as DC/DC Converters

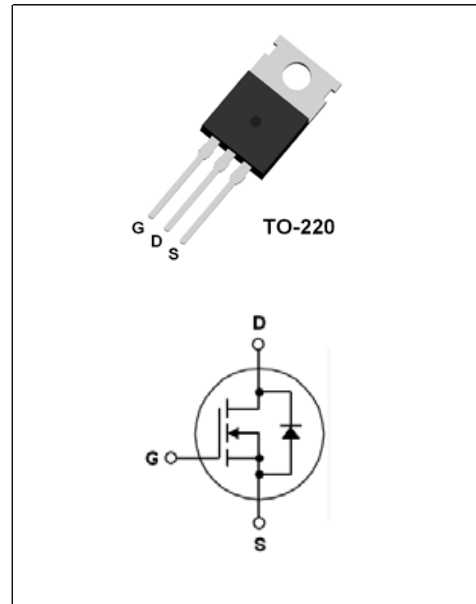

### Absolute Maximum Ratings @ $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Unit
$V_{DSS}$	Drain to Source Voltage	60	V
$V_{GSS}$	Gate to Source Voltage	$\pm 25$	V
$I_D$	Drain Current	$T_C=25\text{ }^\circ\text{C}$	50
		$T_C=100\text{ }^\circ\text{C}$	35.4
$I_{DM}$	Pulsed Drain Current (Note1)	200	A
$P_D$	Maximum Power Dissipation	$T_C=25\text{ }^\circ\text{C}$	130
	Derate above $25\text{ }^\circ\text{C}$		0.8
$E_{AS}$	Single Pulsed Avalanche Energy (Note 2)	720	mJ
$T_J$	Operating Junction Temperature Range	-55~+175	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-55~+175	$^\circ\text{C}$

### Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	1.24	$^\circ\text{C/W}$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C/W}$

**Electrical Characteristics** @T<sub>c</sub>=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =250uA	60	-	-	V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA	2	3.35	4	V
R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =10V, I <sub>D</sub> =25A	-	0.018	-	Ω
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =V <sub>DSS</sub> , V <sub>GS</sub> =0V	-	-	1	uA
I <sub>GSS</sub>	Gate to Source Leakage Current	V <sub>GS</sub> =V <sub>GSS</sub> , V <sub>DS</sub> =0V	-	-	±100	nA

**D-S Diode Characteristics and Maximum Rating** @T<sub>c</sub>=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I <sub>S</sub>	Maximum Drain to Source Diode Forward Current		-	-	50	A
V <sub>SD</sub>	Drain-Source Diode Forward Voltage	V <sub>GS</sub> =0V, I <sub>S</sub> =50A	-	1.03	1.5	V
T <sub>rr</sub>	Reverse Recovery Time	V <sub>GS</sub> =0V, I <sub>S</sub> =50A,	-	50	-	ns
Q <sub>rr</sub>	Reverse Recovery Charge	di/dt=-100A/us	-	75	-	nC

**Switching Characteristics** @T<sub>c</sub>=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
t <sub>d(on)</sub>	Turn-on Delay Time	I <sub>D</sub> =25A, V <sub>DD</sub> =30V, R <sub>G</sub> =25Ω (Note 3)	-	15	40	ns
t <sub>r</sub>	Turn-on Rise Time		-	105	220	ns
t <sub>d(off)</sub>	Turn-off Delay Time		-	60	130	ns
t <sub>f</sub>	Turn-off Fall Time		-	65	140	ns
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =25V, f=1.0MHz	-	1180	1540	pF
C <sub>oss</sub>	Output Capacitance		-	440	580	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	65	90	pF
Q <sub>g</sub>	Total Gate Charge	I <sub>D</sub> =50A, V <sub>DD</sub> =48V V <sub>GS</sub> =10V (Note 3)	-	31	41	nC
Q <sub>gs</sub>	Gate to Emitter Charge		-	8	-	nC
Q <sub>gd</sub>	Gate to Collector Charge		-	13	-	nC

**Note:**

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. V<sub>DD</sub>=25V, L=0.5mH, V<sub>clamp</sub>=1500V, V<sub>g</sub>=10V, I<sub>d</sub>=50A
3. Essentially independent of operating temperature typical characteristics

**Typical Performance Characteristics**

Fig. 1. Typical on-Resistance Characteristics

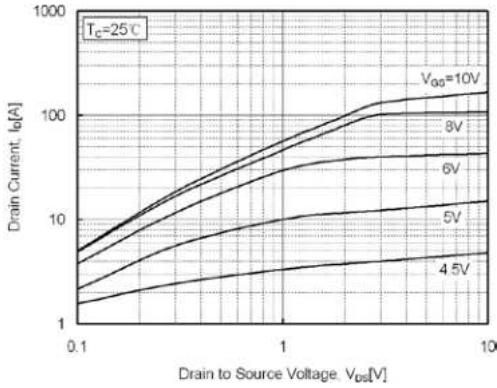


Fig. 2. Typical Transfer Characteristics

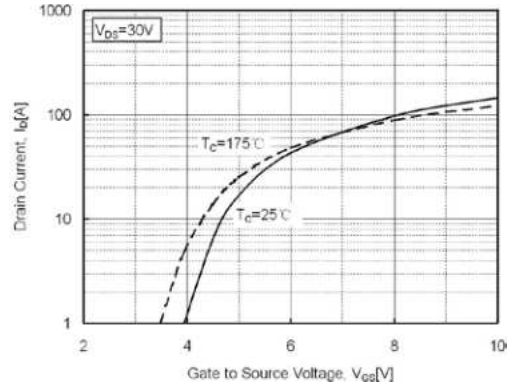


Fig. 3. Static on-Resistance vs.  $I_D$

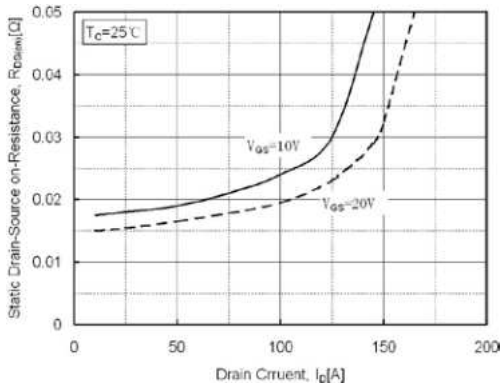


Fig. 4. Body Diode Forward Voltage vs.  $I_{DR}$

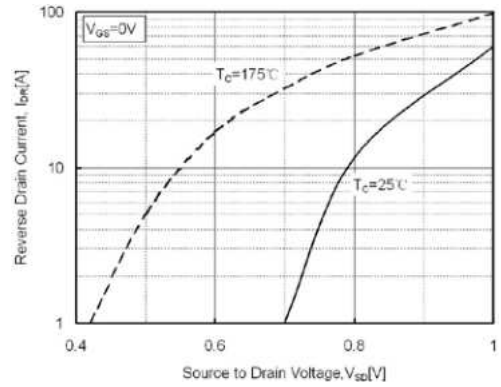


Fig. 5. Capacitance Characteristics


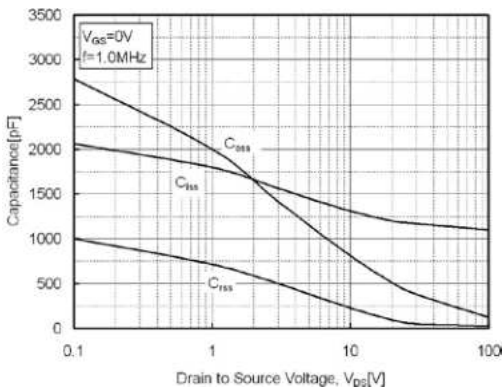


Fig. 6. Gate Charge Characteristics

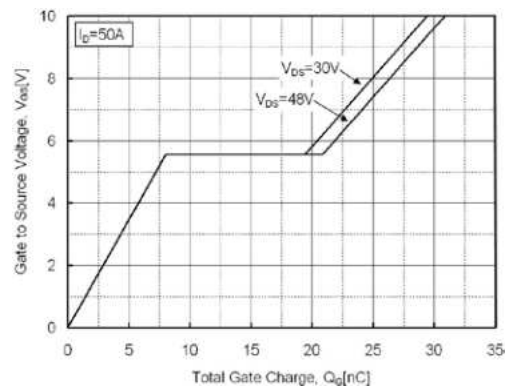

**Typical Performance Characteristics**

Fig. 7. Breakdown Voltage vs. Temperature

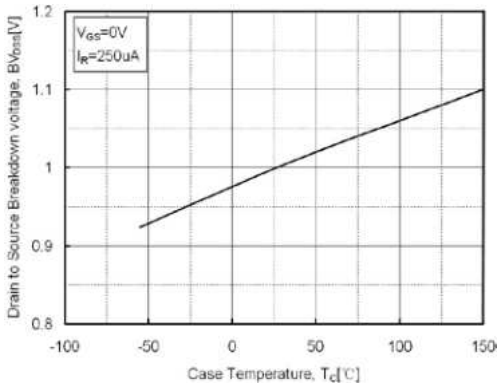


Fig. 8. Static on-Resistance vs. Temperature

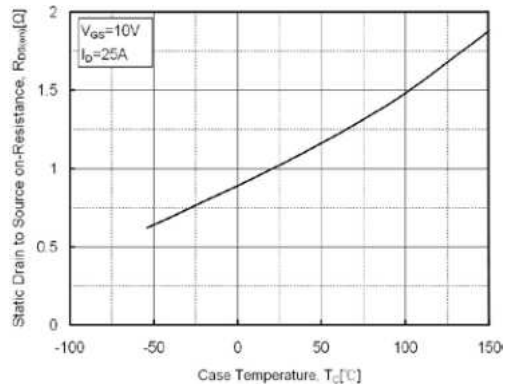


Fig. 9. Maximum Safe Operating Area

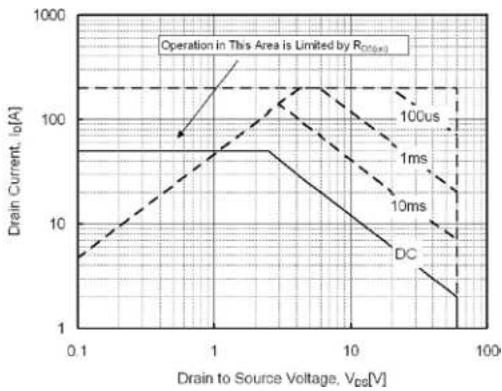


Fig. 10. Maximum Drain Current vs. Temperature


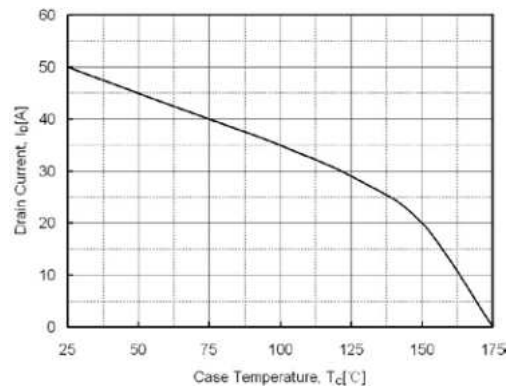


Fig. 11. Transient Thermal Response Curve

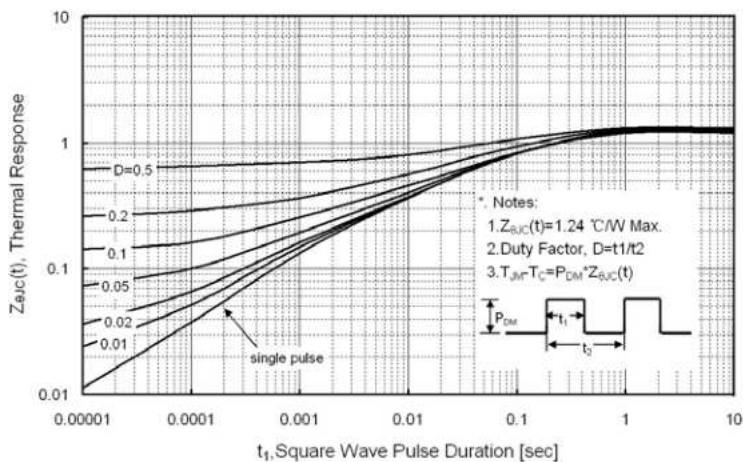

**Package Dimensions**

**TO-220**

(Dimensions in Millimeters)

