

1200V 80mΩ N-Channel SiC Power MOSFET

Description


The AKCT80N120HB4L is a high blocking voltage N-Channel SiC power MOSFET. This device provide excellent performance for high voltage power supplies or pulse circuits.

Features

- Typical on-Resistance: $R_{DS(on)}=80\text{m}\Omega(\text{typ.})$
- High Blocking Voltage
- 100% Avalanche Test
- Good Stability and Uniformity with High E_{AS}

Applications

- Solar Inverters
- High Voltage DC/DC Converters
- Motor Drivers
- Switch Mode Power Supplies

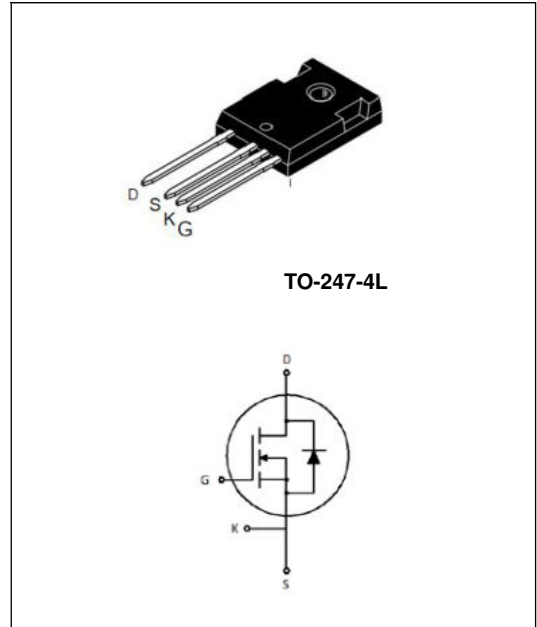

TO-247-4L

Absolute Maximum Ratings @ $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Unit
V_{DSS}	Drain to Source Voltage	1200	V
V_{GSS}	Gate to Source Voltage	-10/+25	V
V_{GSop}	Recommended operation Values of Gate -Source Voltage	-5/+20	V
I_D	Drain Current	$T_C=25\text{ }^\circ\text{C}$	33
		$T_C=100\text{ }^\circ\text{C}$	23.8
I_{DM}	Pulsed Drain Current (Note1)	80	A
P_D	Maximum Power Dissipation	$T_C=25\text{ }^\circ\text{C}$	300
	Derate above $25\text{ }^\circ\text{C}$		2.86
E_{AS}	Single Pulsed Avalanche Energy (Note 2)	800	mJ
T_J	Operating Junction Temperature Range	-40~+175	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-40~+150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.5	$^\circ\text{C}/\text{W}$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	$^\circ\text{C}/\text{W}$

Electrical Characteristics @T_C=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain to Source Breakdown Voltage	V _{GS} =0V, I _D =100uA	1200	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =15mA	2	2.5	4.2	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} =20V, I _D =20A	-	75	95	mΩ
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =V _{DSS} , V _{GS} =0V	-	-	100	uA
I _{GSS}	Gate to Source Leakage Current	V _{GS} =V _{GSS} , V _{DS} =0V	-	-	±500	nA

D-S Diode Characteristics and Maximum Rating @T_C=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} =0V, I _S =10A	-	3.1	-	V
t _{rr}	Reverse Recovery Time	V _{GS} =0V, I _S 20A, di/dt=-1000A/us	-	30	-	ns
Q _{rr}	Reverse Recovery Charge		-	70	-	nC

Switching Characteristics @T_C=25 °C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
t _{d(on)}	Turn-on Delay Time	I _D =20A , V _{DD} =800V, R _G =2.5Ω V _{GS} = -5/20V, (Note 3)	-	26	-	ns
t _r	Turn-on Rise Time		-	22	-	ns
t _{d(off)}	Turn-off Delay Time		-	50	-	ns
t _f	Turn-off Fall Time		-	39	-	ns
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =800V, f=1.0MHz	-	1250	-	pF
C _{oss}	Output Capacitance		-	70	-	pF
C _{rss}	Reverse Transfer Capacitance		-	10.2	-	pF
Q _g	Total Gate Charge	I _D =20A, V _{DD} =800V V _{GS} =-5V/20V (Note 3)	-	75	-	nC
Q _{gs}	Gate to Source Charge		-	25	-	nC
Q _{gd}	Gate to Drain Charge		-	15.8	-	nC

Note:

1. Repetitive rating: pulse-width limited by maximum junction temperature
2. V_{DD}=100V, L=10mH, V_{clamp}=1200V, V_G=10V
3. Essentially independent of operating temperature typical characteristics.

Typical Performance Characteristics

Fig. 1. Typical on-Resistance Characteristics

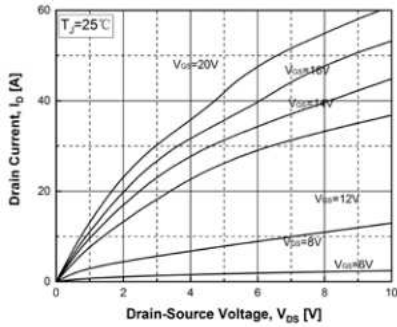


Fig. 2. On-Resistance vs. Drain Current and Gate Voltage

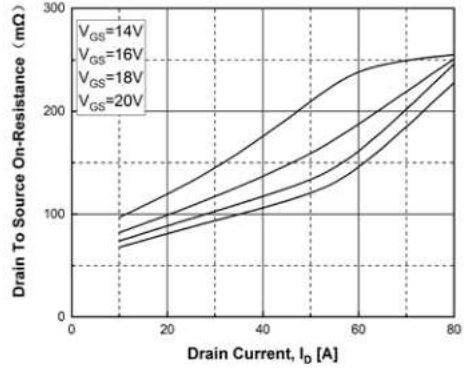


Fig. 3. Normalized On-Resistance vs. Junction Temperature

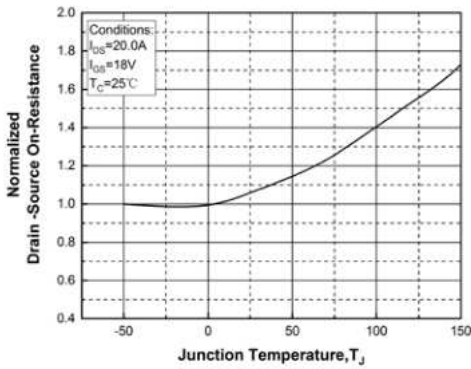


Fig. 4. On-Resistance vs. Gate-to-source Voltage

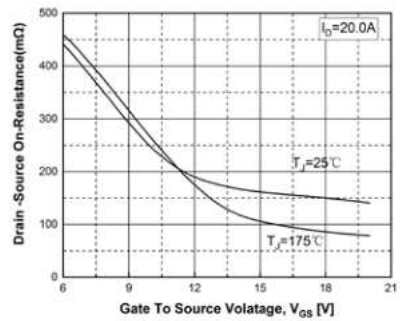


Fig. 5. Transfer Characteristics


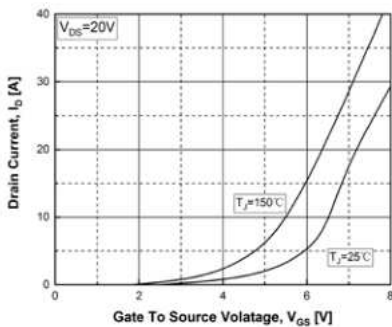


Fig. 6. Source-to-Drain Diode Forward Voltage vs. Source Current

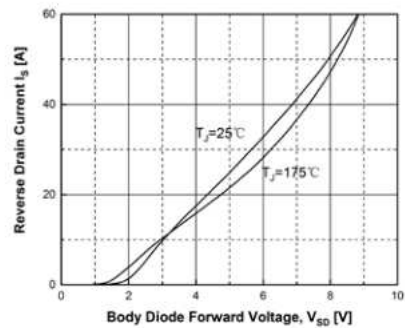

Typical Performance Characteristics

Fig. 7. Gate Charge Characteristics

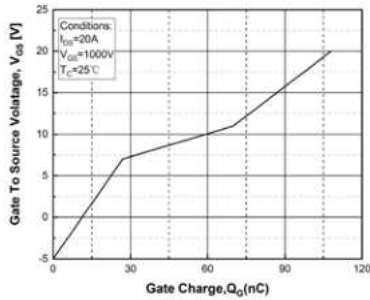


Fig. 8. Characteristics vs. Drain-to-Source Voltage


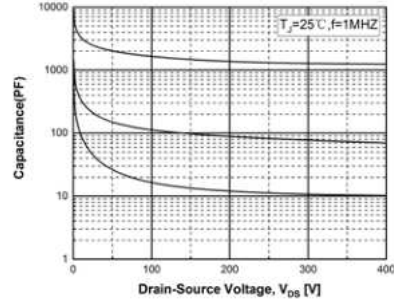


Fig. 9. Maximum Drain Current vs. Temperature

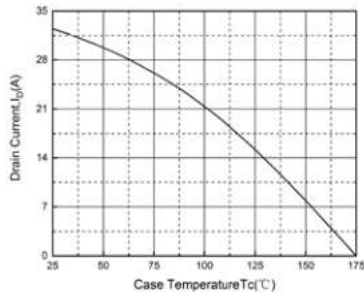

Package Dimensions

TO-247-4L

(Dimensions in Millimeters)

