

## 600V 40A FieldStop Trench IGBT

### Features

- FieldStop Trench Technology, Positive temperature coefficient
- $V_{CE(sat)}=2.25V@I_C=40A$
- $t_{tr}=64ns$  (typ.)
- High Speed Switching & Low Power Loss
- High Input Impedance



### Applications

- PFC, UPS, Welder, PV Inverter

### Description

The device is designed by advanced FieldStop Trench technology process. This IGBT offer low  $V_{CE(sat)}$ , high speed switching performance and excellent quality for application such as PFC, UPS, Welder, PV Inverter and other switching applications.

### Package Type & Internal Circuit



### Absolute Maximum Ratings

Symbol	Parameter	Ratings	Unit	
$V_{CES}$	Collector to Emitter Voltage	600	V	
$V_{GES}$	Gate to Emitter Voltage	$\pm 20$	V	
$I_C$	Collector Current	$T_C=25^\circ C$	80	A
		$T_C=100^\circ C$	40	A
$I_{CM}$	Pulsed Collector Current	120	A	
$I_F$	Diode Continuous Forward Current	$T_C=100^\circ C$	40	A
$I_{FM}$	Diode Maximum Forward Current	80	A	
$P_D$	Maximum Power Dissipation	$T_C=25^\circ C$	258	W
		$T_C=100^\circ C$	129	W
$T_J$	Operating Junction Temperature Range	-40~+175	$^\circ C$	
$T_{STG}$	Storage Temperature Range	-55~+150	$^\circ C$	

### Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$ (IGBT)	Thermal Resistance, Junction to case for IGBT	0.58	$^\circ C/W$
$R_{th(J-C)}$ (Diode)	Thermal Resistance, Junction to case for Diode	1.8	$^\circ C/W$
$R_{th(J-A)}$	Thermal Resistance, Junction to Ambient	40	$^\circ C/W$

## Electrical Characteristics of IGBT @ $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$BV_{CES}$	Collector to Emitter Breakdown Voltage	$V_{GE}=0V, I_C=250\mu A$	600	-	-	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=40A, V_{GE}=15V$	-	2.25	2.7	V
		$I_C=40A, V_{GE}=15V, T_C=125^\circ\text{C}$	-	2.55	-	V
$V_{GE(th)}$	Gate Threshold Voltage	$V_{CE}=V_{GE}, I_C=250\mu A$	4.0	5.3	6.0	V
$I_{CES}$	Zero Gate Voltage Collector Current	$V_{CE}=V_{CES}, V_{GE}=0V$	-	-	1	$\mu A$
$I_{GES}$	Gate to Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0V$	-	-	$\pm 250$	nA

## Electrical Characteristics of Diode @ $T_C=25^\circ\text{C}$ unless otherwise noted


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_F$	Diode Forward Voltage	$I_F=40A$	-	1.72	2.0	V
		$I_F=40A, T_C=125^\circ\text{C}$	-	1.65	1.9	V
$t_{rr}$	Diode Reverse Recovery Time	$I_F=40A, di/dt=-200A/\mu s$	-	64	-	ns
$I_{rr}$	Diode Peak Reverse Recovery Current		-	6.8	-	A
$Q_{rr}$	Diode Reverse Recovery Charge		-	130	-	nC

## Switching Characteristics @ $T_C=25^\circ\text{C}$ unless otherwise noted


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit	
$t_{d(on)}$	Turn-on Delay Time	$I_C=40A, V_{CC}=400V, V_{GE}=15V, R_G=7\Omega, \text{Inductive Load}, T_C=25^\circ\text{C}$	-	18.1	-	ns	
$t_r$	Rising Time		-	15.4	-	ns	
$t_{d(off)}$	Turn-off Delay Time		-	78.3	-	ns	
$t_f$	Falling Time		-	17.0	-	ns	
$E_{on}$	Turn-on Switching Loss		-	1.20	-	mJ	
$E_{off}$	Turn-off Switching Loss		-	0.43	-	mJ	
$E_{ts}$	Total Switching Loss		-	1.63	-	mJ	
$t_{d(on)}$	Turn-on Delay Time		$I_C=40A, V_{CC}=400V, V_{GE}=15V, R_G=7\Omega, \text{Inductive Load}, T_C=125^\circ\text{C}$	-	17.7	-	ns
$t_r$	Rising Time			-	17.0	-	ns
$t_{d(off)}$	Turn-off Delay Time			-	93.1	-	ns
$t_f$	Falling Time	-		15.6	-	ns	
$E_{on}$	Turn-on Switching Loss	-		1.60	-	mJ	
$E_{off}$	Turn-off Switching Loss	-		0.41	-	mJ	
$E_{ts}$	Total Switching Loss	-		2.01	-	mJ	
$C_{ies}$	Input Capacitance	$V_{GE}=0V, V_{CE}=25V, f=1.0\text{MHz}$		-	1685	-	pF
$C_{res}$	Reverse Transfer Capacitance			-	74	-	pF
$C_{oes}$	Output Capacitance			-	48	-	pF
$Q_g$	Total Gate Charge	$I_C=40A, V_{CE}=400V, V_{GE}=15V$	-	161	-	nC	
$Q_{ge}$	Gate to Emitter Charge		-	40	-	nC	
$Q_{gc}$	Gate to Collector Charge		-	48	-	nC	
$t_{sc}$	Short Circuit With stand Time	$V_{CC}=400V, V_{GE}=15V$	5	-	-	us	

**Typical Performance Characteristics**


**Fig. 1. Typical Output Characteristics**

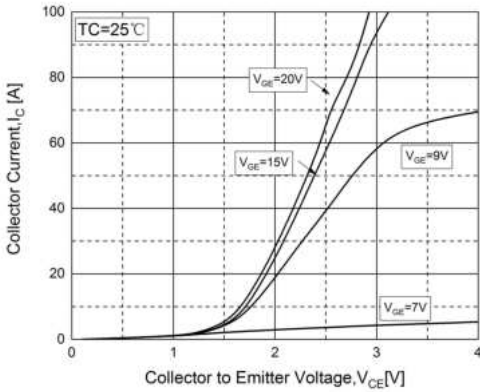


**Fig. 2. Typical Saturation Voltage Characteristics**

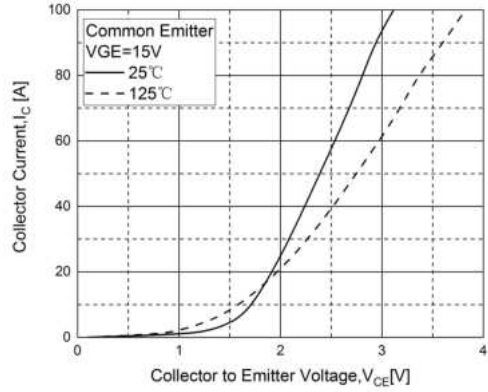


**Fig. 3. Typical Saturation Voltage vs.  $T_C$**

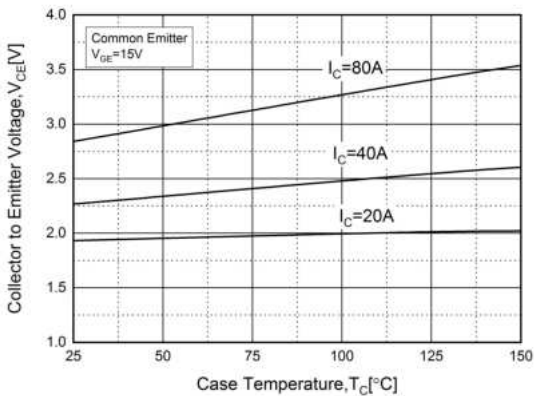


**Fig. 4. Diode Forward Characteristics**

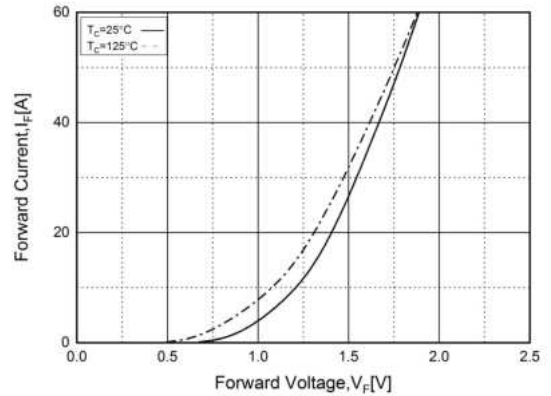

**Fig. 5. Typical Capacitance Characteristics**

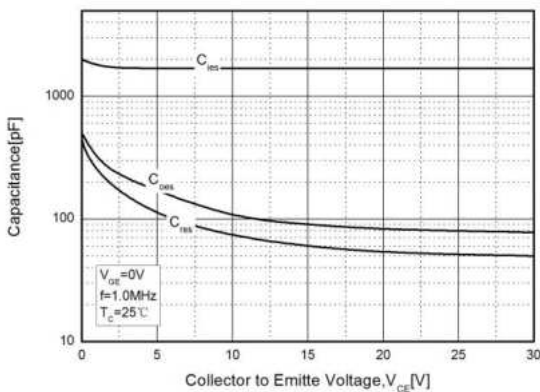


**Fig. 6. Turn-on Characteristics vs.  $R_G$**

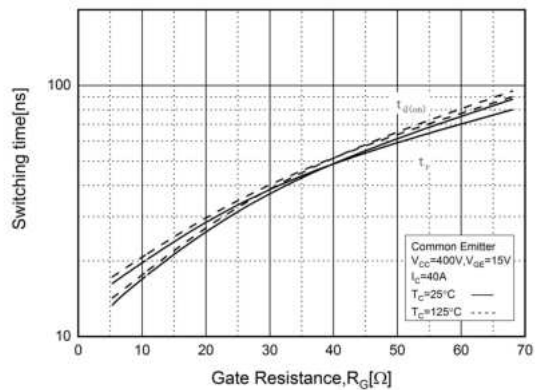


**Typical Performance Characteristics**


**Fig. 7. Turn-off Characteristics vs.  $R_G$**

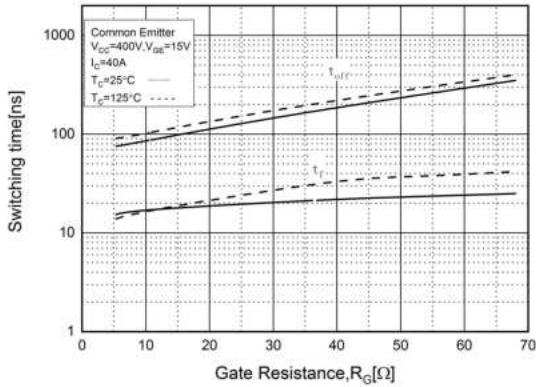


**Fig. 8. Switching Loss vs.  $R_G$**

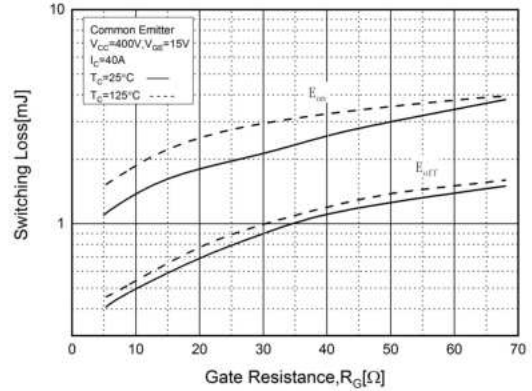


**Fig. 9. Turn-on Characteristics vs.  $I_C$**

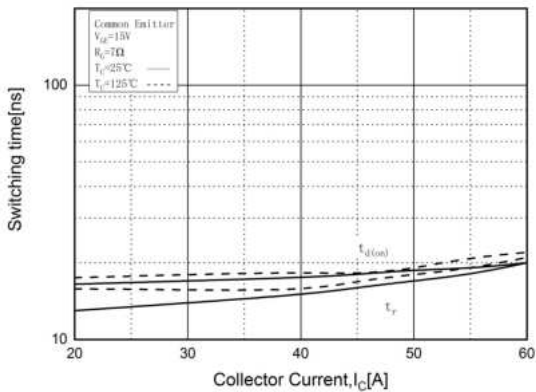


**Fig. 10. Turn-off Characteristics vs.  $I_C$**

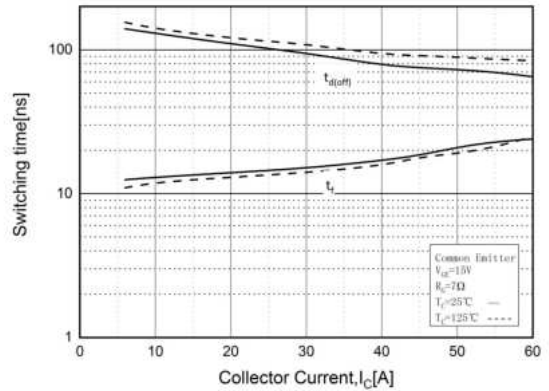

**Fig. 11. Switching Loss vs.  $I_C$**

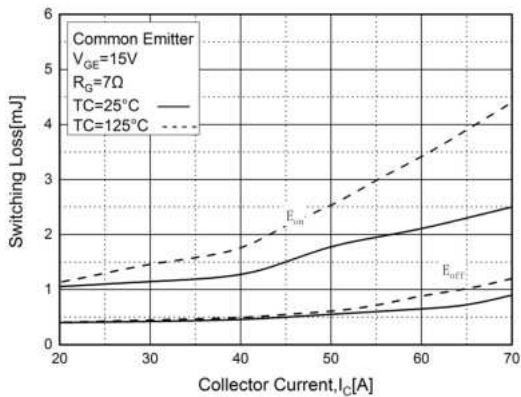

**Fig. 12. Maximum Drain Current vs. Temperature**

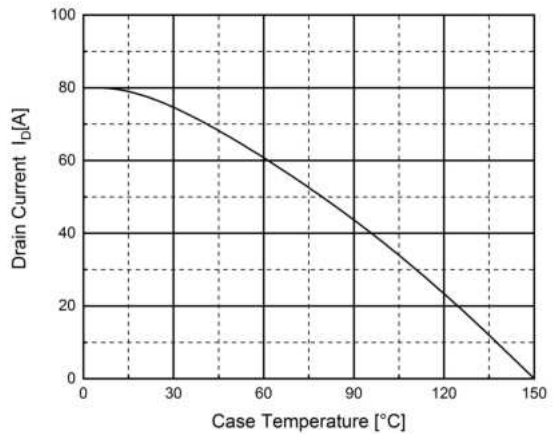

**Package Dimensions**

**TO-3PN**

(Dimensions in Millimeters)

